


# Ceramic Trap Filters



## XT Series Ceramic Trap Filters, DIP Type, 3.58MHz~6.5MHz

### Features


- TV SIF stage use
- Low insertion loss
- Wide bandwidth Ceramic Trap
- RoHS Compliant
- Excellent spurious suppression characteristics
- Frequency: 3.58MHz~6.5MHz

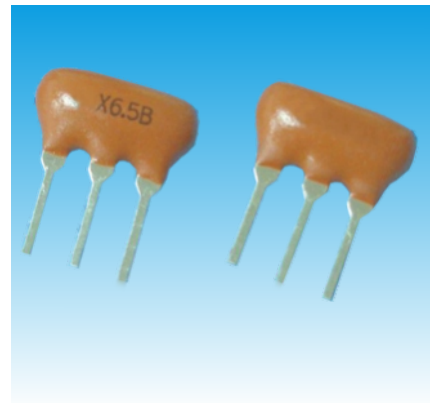

### Standard Specifications (455KHz)

Part Number	Trap Attenuation (at nominal frequency) (dB)	20dB Attenuation Band Width (KHz)	30dB Attenuation Band Width (KHz)
XT3.5MB	25		≥40(70)
XT4.43MB	20		≥50(80)
XT4.5MB	35		≥70(120)
XT5.5MB	35		≥90(120)
XT5.74MB	35		≥90(120)
XT6.0MB	20		≥90(120)
XT6.5MB	20		≥90(120)
XT4.5MB	20	≥30	35
XT5.5MB	20	≥30	20

### Dimensions [mm]

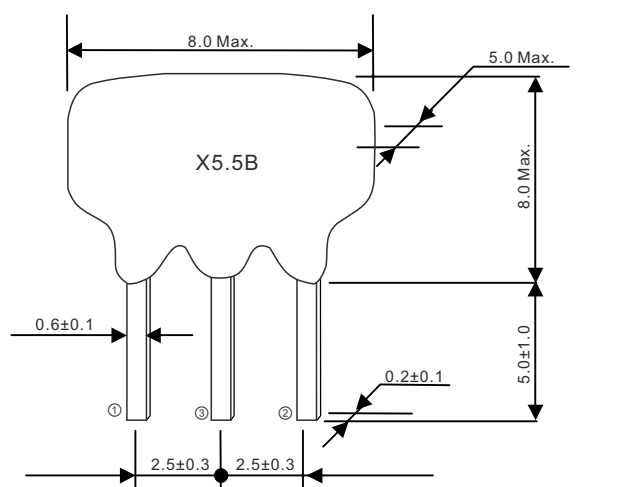

① Input  
③ GND  
② Output

### Characteristics

