


Features

- Differential output crystal oscillator LV-PECL
- Frequency range from 10MHz to 1500MHz
- 2.5V /3.3V operation voltage
- Excellent low phase noise and jitter
- 3-state function available
- Automatic mounting and reflow soldering
- Applications: *Ethernet, Server, PC, ADC, Storage Area Network, SONET, etc*
- RoHS Compliant & Pb Free

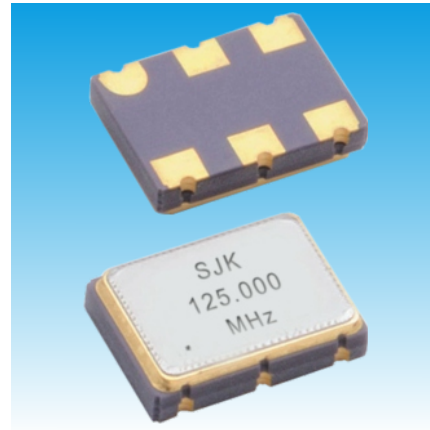


Standard Specifications

Type	7J SMD LV-PECL Differential Oscillator	
Output Type	LV-PECL	
Output Load	50Ω to Vcc-2V	
Supply Voltage	2.5V / 3.3V	
Frequency Range	10~320 MHz	10~1500 MHz
Supply Current	100mA Max.	50mA Max.
Overall Frequency Stability*	±25ppm, ±50ppm, or specify	
Operating Temperature	-40~+85°C, or specify	
Storage Temperature	-55~+125°C	
Voltage Vol (Max.) / Voh (Min.)	Vcc-1.62V / Vcc-1.026V	
Rise (Tr) / Fall (Tf) Time	1ns Max.	
Start-up Time	2ms Max.	10ms Max.
Duty Cycle	45~55%	
Phase Noise (156.25MHz) at 1KHz	-130dBc/Hz	-113dBc/Hz
Phase Jitter (12KHz~20MHz)	1ps Max.	
Aging (at 25°C)	±3ppm /Year Max.	
Packing Units	1000pcs. /Reel	

* Including frequency tolerance at 25°C, variation over temperature, supply voltage variation, aging and vibration.

Dimensions [mm]

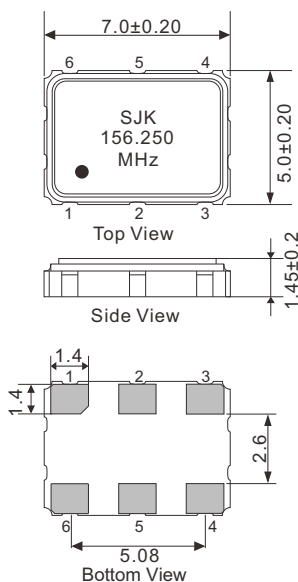

Pin Connections

Pin No.	Connection
1	OE or NC
2	OE or NC
3	GND
4	Output
5	Comp. Output
6	Vcc

* External decoupling capacitor required

