

# SMD Crystal Resonators




Size: 1.6×1.2×0.35 mm

7Y Series SMD Crystal Resonator

## Features

- 1612 size miniature and light SMD crystal resonator with a low profile of 0.35mm.
- Wide frequency range from a comparatively low 24MHz up to 54MHz.
- High precision and high frequency stability.
- Automatic mounting and reflow soldering.
- Applications in smart phone, sip module, variety of compact portable consumer products.
- RoHS Compliant / Pb-Free.

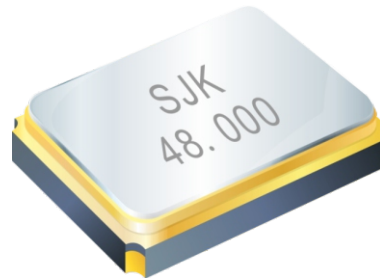

## Electrical Specifications

Item /Type	7Y (SMD 1612 crystal resonator)
Frequency Range	24~54MHz
Frequency Tolerance(at 25 °C)	±10ppm, ±20ppm, or specify
Frequency Stability Over Operating Temperature Range	±10ppm, ±20ppm, or specify
Operating Temperature Range	-20~+70°C, or specify
Shunt Capacitance(C <sub>0</sub> )	3pF Max.
Drive Level	1~200µW Max.(50µW Typical)
Load Capacitance	8pF, 10pF, or specify
Aging (at 25°C)	±3ppm / year Max.
Storage Temperature Range	-55~+125°C
Packing Unit	3000pcs./Reel

## Equivalent Series Resistance(ESR)

Fundamental	
24~30MHz	100 Ω Max.
30~54MHz	80 Ω Max.

## Dimensions

Units:mm

