


Features

- 1-Port Resonator
- Ceramic Package for Surface Mounted Technology (SMT)
- Package size 3.8x3.8x1.5 mm
- RoHS compatible
- Package code DCC6
- Electrostatic Sensitive Device (ESD)

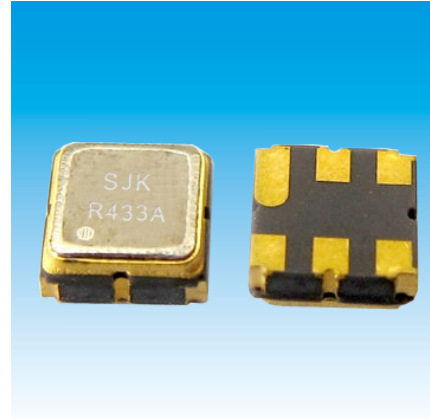


Standard Specifications

| P/N | Center Frequency (MHz) | Frequency Tolerance (KHz) | Insertion Loss (dB) | Package Code |
|------|------------------------|---------------------------|---------------------|--------------|
| R315 | 315 | ±30 /±75 | 1.5 | DCC6 |
| R385 | 385 | ±30 /±75 | 1.8 | DCC6 |
| R418 | 418 | ±30 /±75 | 1.6 | DCC6 |
| R433 | 433.82 | ±30 /±75 | 1.5 | DCC6 |
| R868 | 868.35 | ±75 /±150 | 1.0 | DCC6 |

For other frequencies and specifications, please contact our sales department.

Dimensions [mm]

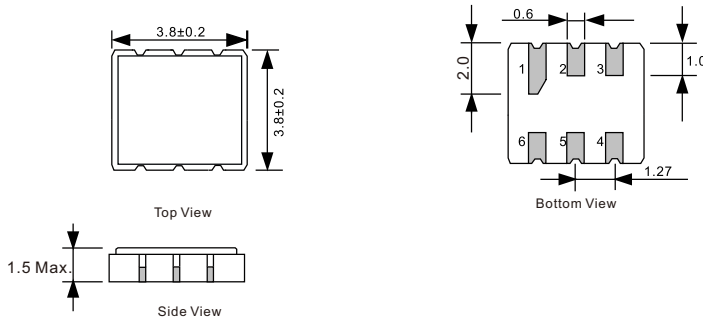

Pin Function

| Pin No. | Function |
|------------|---------------|
| 2 | Input /Output |
| 1 /3 /4 /6 | Case Ground |
| 5 | Output /Input |